



BOSCH

Invented for life

LBB 9082/00 Unidirectional Gooseneck Microphone




- ▶ Unidirectional dynamic microphone
- ▶ Flexible stem
- ▶ Excellent speech reproduction
- ▶ Rugged construction
- ▶ Built-in pop shield
- ▶ Flange mounting
- ▶ Matt black finish

The gooseneck microphone is a stylish high quality unidirectional dynamic microphone, mainly intended for public address applications.


Functions

The flexible stem has an M10 screw fitting for mounting onto (fireman's) panels, lecterns or desktops.


Installation/Configuration Notes

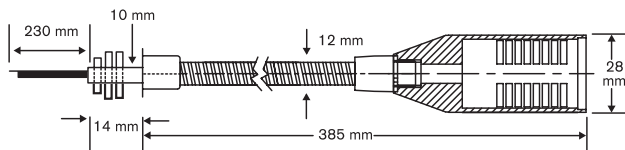

Dimensions in mm

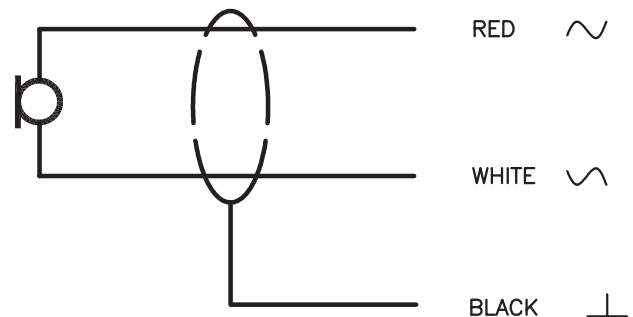

Circuit diagram

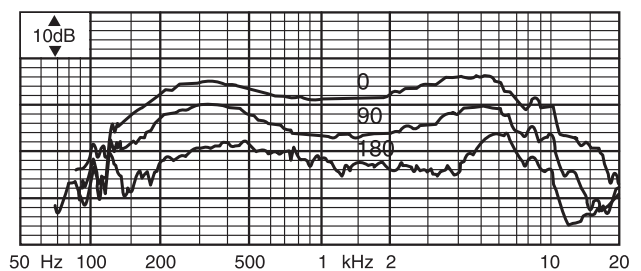

Frequency response

Technical Specifications

Electrical*

Type	Gooseneck
Polar pattern	Unidirectional
Frequency response	100 Hz to 15 kHz
Sensitivity	1.2 mV/Pa \pm 4 dB
Rated output impedance	500 ohm

* Technical performance data acc. to IEC 60268-4

Mechanical

Dimensions	28 x 385 mm (1.10 x 15.16 in)
Weight	225 g (8 oz)
Color	Black
Cable type	2-core screened
Cable length	230 mm

Environmental

Operating temperature	-25 °C to +55 °C (-13 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

Ordering Information

LBB 9082/00 Unidirectional Gooseneck LBB9082/00

Microphone

unidirectional dynamic microphone with flexible stem